

This durable, fine-wire SENC air powered tool is designed for professional performance. Various SFW10XP models drive staples ranging in length from 5/32" (5 mm) to 5/8" (16 mm), and have excellent features for user comfort, resulting in greater production output.



Specifications

Item#.....	See below
Reg. Operating Pressure.....	60-95 psi (4.1 - 6.5 bar)
Air Consumption (60 cycles per min.)77 scfm
Air Inlet.....	1/4" NPT
Tool Weight	2 lbs (0.9 kg)
Height.....	5.81" (151 mm)
Length	9.5" (241 mm)
Width	1.6" (41 mm)
Fastener Capacity.....	110-185

Fastener Specifications


Gauge.....	22-20
Crown.....	3/16", 1/2", 3/8"
Fastener Range.....	5/32" - 5/8"
Finish.....	Galvanized & Stainless
Collation.....	Glued stright strip

Applications

Upholstering operations, furniture assembly, cabinets, automotive vinyl roofs and interior trim, bedding manufacture, TV and stereo grille cloth, picture frames, shoemaking, molding and roofing felt.


Features and Benefits

- Five year limited warranty
- Full 1" lip length makes getting into tight spots easier
- Rounded steel cap – won't harm fabric
- Rear exhaust – keeps oil off fabric
- Push-down magazine release – makes loading and unloading the bottom-load magazine easier
- Cast aluminum outer rail –longer life and durability
- Both U.S. and metric skirt guide cast into outer magazine – no need for tape measure
- No front screw heads – tool glides through fabric
- Compact tool design – easily reaches tight spots
- Reload window – indicates when to reload and provides access spot to clean lint from magazine without having to disassemble the tool

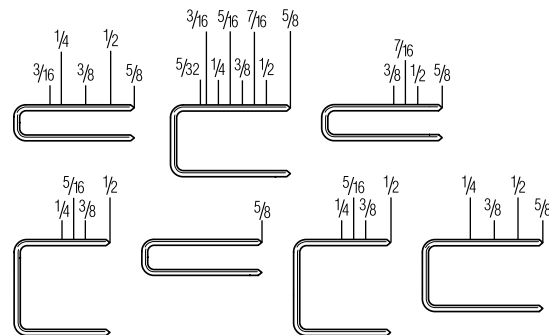

SFW10XP Gauge: 22 Staple Range:

SFW10XP-A/D	Crown	3/16" Staples	3/16" - 1/2"	Item # 1D0101N
SFW10XP-B	Crown	1/2" Staples	1/4" - 1/2"	Item # 1D0141N
SFW10XP-C	Crown	3/8" Staples	5/32" - 3/8"	Item # 1D0121N
SFW10XP-E	Crown	3/16" Staples	3/8" - 3/8"	Item # 1D0111N
SFW10XP-F	Crown	1/2" Staples	1/4" - 1/2"	Item # 1D0151N
SFW10XP-G	Crown	3/8" Staples	1/4" - 3/8"	Item # 1D0131N

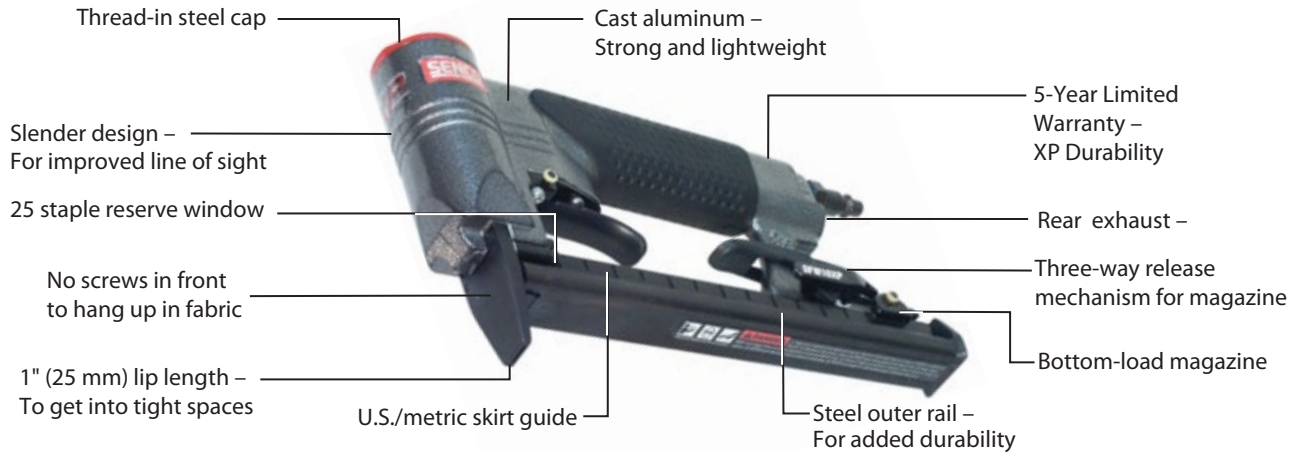

— SFW10XP-A/D — **22 Ga. 3/16" Crown**

Furniture upholstery, felt, insulation, casebacks, screening and shoes

Length	Item Code	Carton Count	Finish
1/4	A04BAAN	10.M	Galv
3/8	A06BABN	30.M	Galv
3/8	A06BABP	40.M	Galv
1/2	A08BAB	20.M	Galv
1/2	A08BABP	30.M	Galv
5/8	D10BABN	20.M	Galv
5/8	D10BABPN	23.M	Galv

Crown: 3/16 (4.8mm)
Width: .030
Thickness: .0215
Gauge: 22

— SFW10XP-E — **20 Ga. 3/16" Crown**

Furniture upholstery, felt, insulation, casebacks, screening and shoes

Length	Item Code	Carton Count	Finish
3/8	E06BAA	10.M	Galv
1/2	E08BAA	10.M	Galv
5/8	E10BAA	5.M	Galv

Crown: 3/16 (4.8mm)
Width: .050
Thickness: .019
Gauge: 20

— SFW10XP-B — **22 Ga. 1/2" Crown**

Furniture upholstery, felt, insulation, casebacks, screening and shoes

Length	Item Code	Carton Count	Finish
1/4	B04BAAPN	25.M	Galv
5/16	B05BAAP	45.M	Galv
3/8	B06BAAP	40.M	Galv
1/2	B08BAAP	25.M	Galv

Crown: 1/2 (12.7mm)
Width: .030
Thickness: .0215
Gauge: 22

— SFW10XP-F — **20 Ga. 1/2" Crown**

Upholstery, felt, insulation and casebacks, D Tool: Bedding, packaging and set-up boxes

Length	Item Code	Carton Count	Finish
1/4	F04BAAN	10.M	Galv
1/4	F04BAAP	17.M	Galv
5/16	F05BAAP	24.M	Galv
3/8	F06BAA	10.M	Galv
3/8	F06BAAP	24.M	Galv
1/2	F08BAAN	10.M	Galv
3/8	F06BGA	10.M	Stainless

Crown: 1/2 (12.7mm)
Width: .050
Thickness: .019
Gauge: 20

— SFW10XP-C — **22 Ga. 3/8" Crown**

Furniture upholstery, felt, insulation, casebacks, screening and shoes

Length	Item Code	Carton Count	Finish
5/32	C02BAAPN	60.M	Galv
3/16	C03BAAPN	55.M	Galv
1/4	C04BAAP	35.M	Galv
5/16	C05BAAPN	28.M	Galv
3/8	C06BAAP	50.M	Galv
7/16	C07BAAPN	40.M	Galv
1/2	C08BAAP	35.M	Galv
5/8	C10BAAP	27.M	Galv
3/16	C03BGAN	25.M	Stainless
3/8	C06BGA	10.M	Stainless
3/8	C06BGAP	25.M	Stainless


Crown: 3/8 (9.5mm)
Width: .030
Thickness: .0215
Gauge: 22

— SFW10XP-G — **20 Ga. 3/8" Crown**

Upholstery, felt, insulation and casebacks

Length	Item Code	Carton Count	Finish
1/4	G04BAAN	10.M	Galv
3/8	G06BABN	5.M	Galv
1/2	G08BAB	5.M	Galv
5/8	G10BAB	5.M	Galv

Crown: 3/8 (9.5mm)
Width: .045
Thickness: .023
Gauge: 20



Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on trigger systems and how SENCOR will save you time, reduce costs, and increase quality, call our toll-free Action Line: 800-543-4596 to find your nearest Authorized Senco Dealer, Distributor or visit our web site at: www.senco.com